




Wireless Public Safety DAS Annunciator Panel *Model 1221W*

SAVE Thousands of \$ On Expensive Conduit, Fire-Proof Cable and Installation Labor

- Long range transmission
- Works in virtually any size building
- Compatible with all BDAs, BBUs and Fire Panels
- Meets or exceeds all UL, NFPA and FCC requirements
- Can be **Wirelessly Networked** to an unlimited number of additional Annunciator Panels
- Perfect for large buildings, campus and retrofit installations
- Unique Error Correction and False-Alarm-Proof design PATENT PENDING

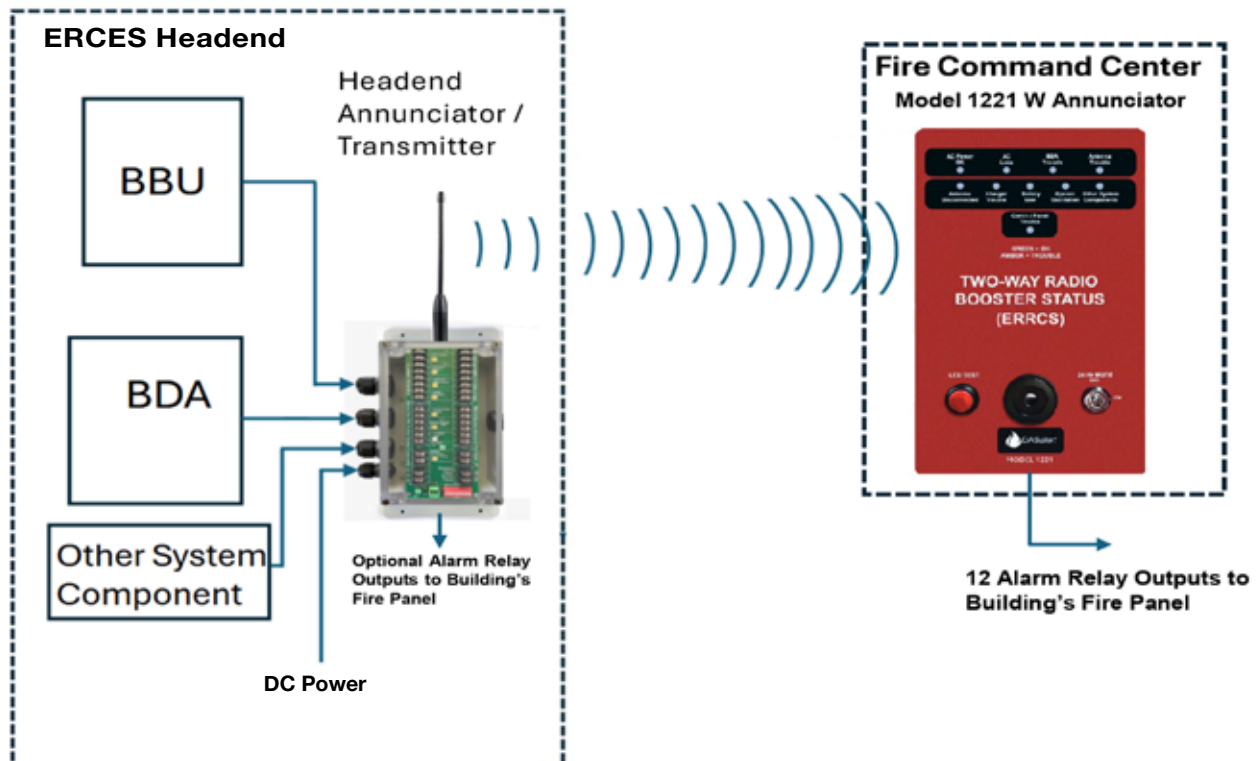

Specifications

Headend Transmitter / Annunciator	
Dimensions	7.9" H x 4.7" W x 3.0" D
DC Power	TX:24 VDC, RX:12 VDC
LED Indicators	10
Alarm Buzzer 3500 Hz SPL	100 dB
TX frequency	915 MHz
Optional Alarm Dry SPDT Relays	12

Fire Command Center Annunciator	
Dimensions	7.9" H x 4.7" W x 3.0" D
DC Power	24-55 VDC
LED Indicators	10
Alarm Buzzer 3500 Hz SPL	100 dB
Alarm Dry SPDT Relays	12

Receiver supplied with 12 Hour UPS



**Headend Transmitter /
Annunciator**



**Fire Command Center
Annunciator / Receiver**

Optional Accessory



**Flush Mounting in a Wall Cavity
with Decorative Trim Plate**